




Terminal Module Impact Printer
EPSON
TM-U295

**SMALLEST SLIP
PRINTER, PERFECT
FOR POS TERMINALS**

TM-U295

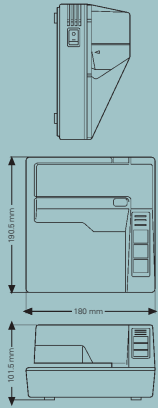

Weight: Approx. 1.6 kg

Specifications

Print Method	7-pin, Shuttle Impact Dot Matrix	
Print Font	Font	5 x 7 / 7 x 7
	Column Capacity	35 / 42 Columns
	Character Size	1.6 (W) x 2.9 (H) / 1.3(W) x 2.9(H) mm
	Character Set	95 Alphanumeric, 32 International, 128 x 3 Graphic
	Character Per Inch	13.5 cpi / 16.2 cpi
Print Speed	2.1 lps	
Data Buffer	512 Bytes or 35 Bytes	
Interface	RS-232 / Bi-directional Parallel	
Paper Dimensions	Slip	80(W) x 69(L) to 182 (W) x 257(L) mm
Paper Thickness	0.09 to 0.25 mm (Total Thickness with Copy:~0.35)	
Copy Capability	One Original and Two Copies	
Inked Ribbon	ERC-27 (Purple) / (Black)	
Ribbon Life	15 x 10 ⁵ Characters	
Power	24 VDC ±10%	
Power Consumption	Approx. 600mA (Mean)	
D.K.D Function	2 Drivers	
Reliability	MTBF	18 x 10 ⁴ Hours
	MCBF	7 x 10 ⁶ Lines
Overall Dimensions	180 (W) x 190.5 (D) x 101.5 (H) mm	
Weight	Approx. 1.6 kg	
Case Colour	ECW (Epson Cool White), EDG (Epson Dark Gray)	
EMC Standards	VCCI Class, A FCC Class A, CE Marking, AS / NZS 3548 Class B	
Safety Standards	UL / CSA / TÜV (EN60950)	

Optional Accessories

PS-180	Power Supply	Input: 100 ~ 240V AC
		Output: 24 VDC, 2.0 A
		Plug: 3P Power Jack
		Safety Standards: UL, CSA, TÜV

INDIA
Epson India Pvt Ltd
Tel: (91) 080-3051-5000
Fax: (91) 080-3051-5005
www.epson.co.in

INDONESIA
PT Epson Indonesia
Tel: (62) 021-572-3161
Fax: (62) 021-572-4357
www.epson.co.id

SINGAPORE
Epson Singapore Pte Ltd
Tel: (65) 6586-5500
Fax: (65) 6271-7066
www.epson.com.sg

THAILAND
Epson (Thailand) Co., Ltd
Tel: (66) 02-670-0680
Fax: (66) 02-670-0688
www.epson.co.th

All products and brand names herein are for identification purpose only and may be the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. All images are simulated in this brochure. Specifications are subject to change without prior notice.

www.epson.com.sg

Dealer's Stamp

EPSON
EXCEED YOUR VISION

ESC/POS® 
Conforms to OLE POS specification